



Sockets



C-Line Socket

Type Approved by DNV-GL

Offshore accessory to be used for Temporary, Mobile and Long Term Mooring
as defined in DNVGL-OS-E301, Position Mooring

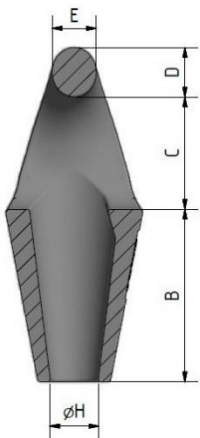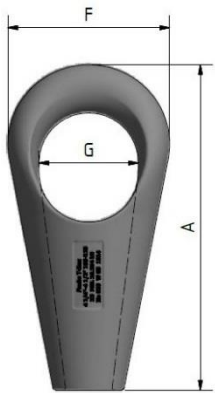

Rope	A	B	C	D	E	F	G	H	R3 MBL kN	R4 MBL kN
31-36	267	138	90	40	35	132	81	38	1189	1416
37-42	312	161	105	46	41	155	95	44	1599	1965
43-48	356	184	120	53	47	177	108	50	2064	2536
49-54	401	207	134	59	53	199	122	57	2581	3171
55-60	445	230	149	66	59	221	136	63	3147	3867
61-68	505	260	169	75	67	250	154	71	3977	4886
69-75	542	280	182	80	72	269	165	77	4767	5875
76-80	594	306	199	88	78	294	181	84	5367	6594
81-86	638	329	214	95	84	316	194	90	6123	7523
87-93	690	356	232	102	91	342	210	98	7052	9002
94-102	757	391	254	112	100	375	231	107	8316	10217
108-115	846	437	284	125	112	420	258	120	10264	12610
122-130	965	498	324	143	127	478	294	137	12663	15559



Type Approval by:

DNV-GL for 31 - 130 mm

Application:

Temporary, Mobile and Long Term Mooring

Manufactured & Tested:

in Germany by Feubo

Material:

Cast Steel – Grade R3, R4

Features:

installation on all vessels classed by DNV GL